

Reusable Pharmaceutical Cold Chain Package- VB Series

Unitized/ full temperature/ elastic supply chain solution
(pharmaceutical grade)



[Characteristics]

- Pre-qualified according to ISTA, WHO, and GSP standards.
- Made of EPP and VIP material. Shock absorbent, damage resistant, and economical.
- Offers 72 - 120 hours of cooling preservation performance.
- Easy to use and assemble, with detailed 3D and SOP manuals available.
- Customizable in sizing, insulation material, thickness, and printing.



[Switch temperature freely by PCM]

【E】 -30°C~-20°C 【K】 -25°C~-15°C 【B】 -20°C~-10°C 【J】 -10°C~0°C
 【F】 0°C~+4°C/+5°C 【C】 +2°C~+8°C 【D】 +15°C~+25°C 【P】 +20°C~+30°C
 【T】 +10°C~+20°C 【W】 -60°C~-50°C



[Application]

Used for transporting temperature-sensitive items like refrigerated medicines, blood products, biological samples, diagnostic reagents, vaccines, clinical specimens, temperature-sensitive chemicals, and electronic products within the region, across cities, provinces, and borders.



01

Anti-collision, drop, heat and pressure resistance



02





Made of VIP material with excellent insulation performance

03

Lightweight and durable, saving transportation costs, and easy to replace or repair



[Validation Test Graph]

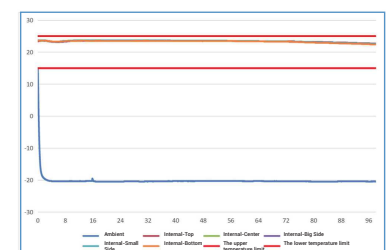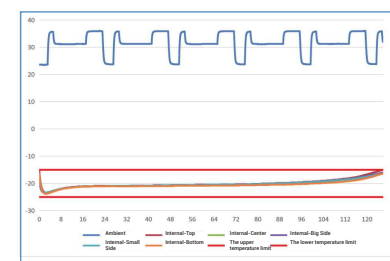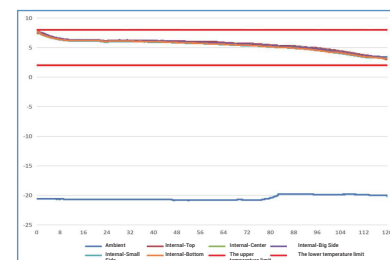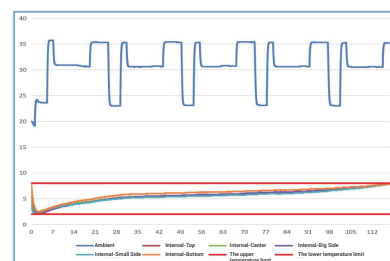

Temperature Range

Duration

Model No.

Volume

Weight

External Dimensions

Payload Size

+2°C~+8°C

All solid and leak-proof type

EPP + VIP insulation layer

· 72h	VB696B	6L	5.8Kg	370*370*385mm	185*185*185mm	7*CS-H650CC2
	VB896B	8L	6.6Kg	465*365*365mm	290*185*185mm	4*CS-H1050CC2、2*CS-H650CC2
	VB1296B	12L	7.3Kg	415*415*415mm	230*230*230mm	6*CS-H1200DC2
	VB2896B	28L	10.9Kg	485*485*475mm	310*310*310mm	6*CS-H1450AC2
· 96h	VB6096B	60L	18.8Kg	615*615*615mm	400*400*400mm	6*CS-H3300AC2
	VB9096B	90L	21.2Kg	775*615*615mm	550*400*400mm	8*CS-H2400AC2、2*CS-H3200AC2
· 120h	VB8096B	80L	21.7Kg	740*730*565mm	510*510*300mm	3*CS-H5000AC2、4*CS-H3600AC2
	VB12596B	125L	27.0Kg	730*720*755mm	510*510*510mm	7*CS-H5000AC2
	VB16096B	160L	29.7Kg	740*730*865mm	510*510*600mm	3*CS-H5000AC2、8*CS-H3400AC2

+15°C~+25°C

EPP + VIP insulation layer

· 72h	VB696B	6L	5.8Kg	370*370*385mm	185*185*185mm	7*CS-H650CD6
	VB896B	8L	6.6Kg	465*365*365mm	290*185*185mm	4*CS-H1050CD6、2*CS-H650CD6
	VB1296B	12L	7.3Kg	415*415*415mm	230*230*230mm	6*CS-H1200DD6
	VB2896B	28L	10.9Kg	485*485*475mm	310*310*310mm	6*CS-H1450AD6
· 96h	VB6096B	60L	18.8Kg	615*615*615mm	400*400*400mm	6*CS-H3300AD6
	VB9096B	90L	21.2Kg	775*615*615mm	550*400*400mm	8*CS-H2400AD6、2*CS-H3200AD6
· 120h	VB8096B	80L	21.7Kg	740*730*565mm	510*510*300mm	3*CS-H5000AD6、4*CS-H3600AD6
	VB12596B	125L	27.0Kg	730*720*755mm	510*510*510mm	7*CS-H5000AD6
	VB16096B	160L	29.7Kg	740*730*865mm	510*510*600mm	3*CS-H5000AD6、8*CS-H3400AD6

-25°C~-15°C

EPP + VIP insulation layer

· 72h	VB696B	6L	5.8Kg	370*370*385mm	185*185*185mm	7*CS-H650CK2
	VB896B	8L	6.6Kg	465*365*365mm	290*185*185mm	4*CS-H1050CK2、2*CS-H650CK2
	VB1296B	12L	7.3Kg	415*415*415mm	230*230*230mm	6*CS-H1200DK2
	VB2896B	28L	10.9Kg	485*485*475mm	310*310*310mm	6*CS-H1450AK2
· 96h	VB606B	60L	18.8Kg	615*615*615mm	400*400*400mm	6*CS-H3300AK2
	VB9096B	90L	21.2Kg	775*615*615mm	550*400*400mm	8*CS-H2400AK2、2*CS-H3200AK2
· 120h	VB8096B	80L	21.7Kg	740*730*565mm	510*510*300mm	3*CS-H5000AK2、4*CS-H3600AK2
	VB12596B	125L	27.0Kg	730*720*755mm	510*510*510mm	7*CS-H5000AK2
	VB16096B	160L	29.7Kg	740*730*865mm	510*510*600mm	3*CS-H5000AK2、8*CS-H3400AK2

Telephone:+86 18816890302 Whatsapp:86-18816890302 Email:sabrina@cctsvip.com

Guangzhou Cesin Cold Chain Technology Co.,Ltd

Add: 8/F, No.8 Chungling Road, Nansha District, Guangzhou, China

Web in Mainland China: www.cctsvip.com

Web: www.coldchaintools.com

